

pixelplus[™]

Xceed *Outdoor*

High performance LED displays
for indoor & outdoor rental applications




Our Pixel Plus Xceed series is tailored made for indoor and outdoor rental applications geared for high performance, fast installation and down-the-road flexibility.

Use Your Display Where You Want




Stacking / Hanging Options

Straight Stacking

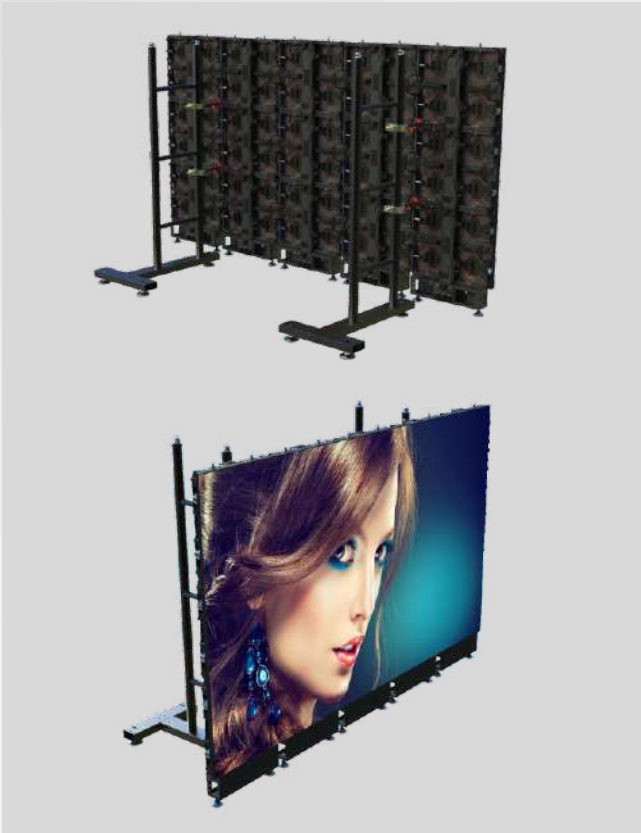

Straight Hanging

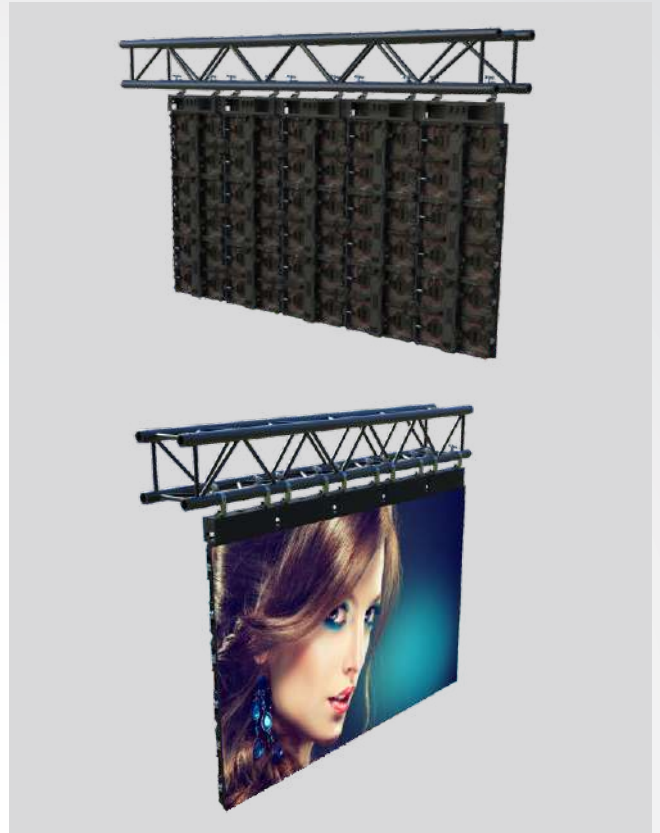

Convex Stacking




Convex Hanging



Concave Stacking



Concave Hanging

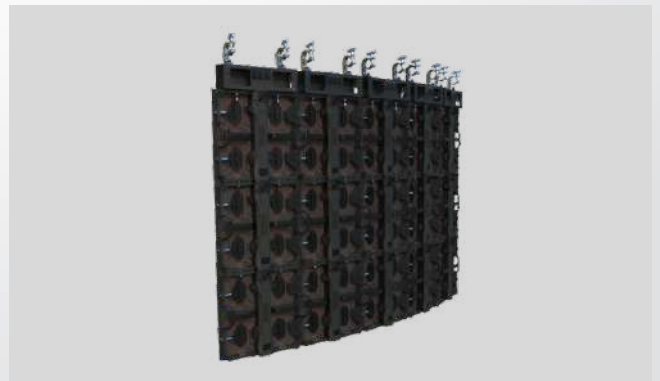

Curving Options



Straight 0°



Concave 5°



Concave 7.5°




Convex -5°



Magnetic Installation



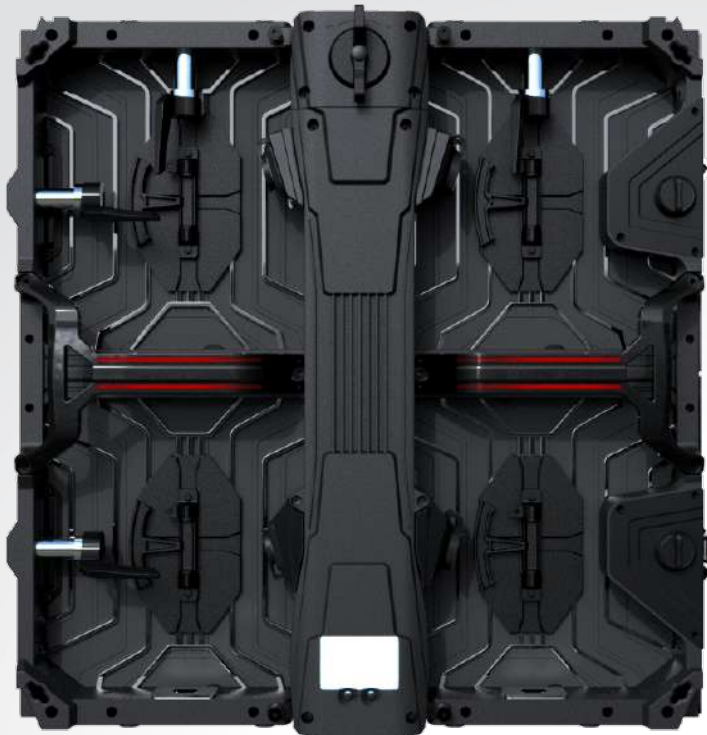

Key Features

- True Black SMD High Contrast
- Black Shell SMD High Brightness
- Calibration Memory in Module
- Magnetic Installation
- No AB Module (no left right)
- Optimized Thermal Design
- Big Viewing Angle
- HDR Ready
- No Ghosting
- Extremely Flat
- High Refresh Rate

Technical Specifications

Pitch	2.6mm	2.9mm	3.2mm	3.9mm	4.8mm	6.25mm
Brightness (True Black SMD)	>4000cd/m ²	>4000cd/m ²	>4500cd/m ²	>4500cd/m ²	>4500cd/m ²	>4500cd/m ²
Brightness (Black Shell SMD)	>5000cd/m ²	>5000cd/m ²	>6000cd/m ²	>6000cd/m ²	>6000cd/m ²	>6000cd/m ²
Viewing Distance	>2.6m	>2.9m	>3.2m	>3.9m	>4.8m	>6.25m
LED Type	SMDxxxx	SMDxxxx	SMD1921	SMD1921	SMD2727	SMD2727
Pixel Density	147456/m ²	112896/m ²	97344/m ²	65536/m ²	43264/m ²	25600/m ²
View Angle	140°/140°	140°/140°	140°/140°	140°/140°	140°/140°	140°/140°
Refresh Rate	>1920-3840Hz	>1920-3840Hz	>1920-3840Hz	>1920-3840Hz	>1920-3840Hz	>1920-3840Hz
Module Size	250x250mm	250x250mm	250x250mm	250x250mm	250x250mm	250x250mm
Cabinet Size	500x500mm	500x500mm	500x500mm	500x500mm	500x500mm	500x500mm
Cabinet Res.	192x192px	168x168px	156x156px	128x128px	104x104px	80x80px
Drive Mode	1/16 scan	1/14 scan	1/10 scan	1/8 scan	1/7 scan	1/5 scan
Environment	IP65/55	IP65/55	IP65/55	IP65/55	IP65/55	IP65/55
Max Power	950W/m ²	950W/m ²	950W/m ²	950W/m ²	950W/m ²	950W/m ²
Voltage	100v - 230v	100v - 230v	100v - 230v	100v - 230v	100v - 230v	100v - 230v
Fire Rate	94UL-VO	94UL-VO	94UL-VO	94UL-VO	94UL-VO	94UL-VO
EU Certification	CE, TUV EMC	CE, TUV EMC	CE, TUV EMC	CE, TUV EMC	CE, TUV EMC	CE, TUV EMC
US Certification	FCC, ETL	FCC, ETL	FCC, ETL	FCC, ETL	FCC, ETL	FCC, ETL
Weight	8.5kg/pcs	8.5kg/pcs	8.5kg/pcs	8.5kg/pcs	8.5kg/pcs	8.5kg/pcs