

*pixelplus*  
**xirius**<sup>TM</sup>

Innovative, Fashionable and intelligent  
LED posters




72 inches

89 inches

80 inches

The Xirius series is a multi-functional LED poster panel  
tailored for retail and advertising applications  
and geared for 24/7 performance.

# Appearance

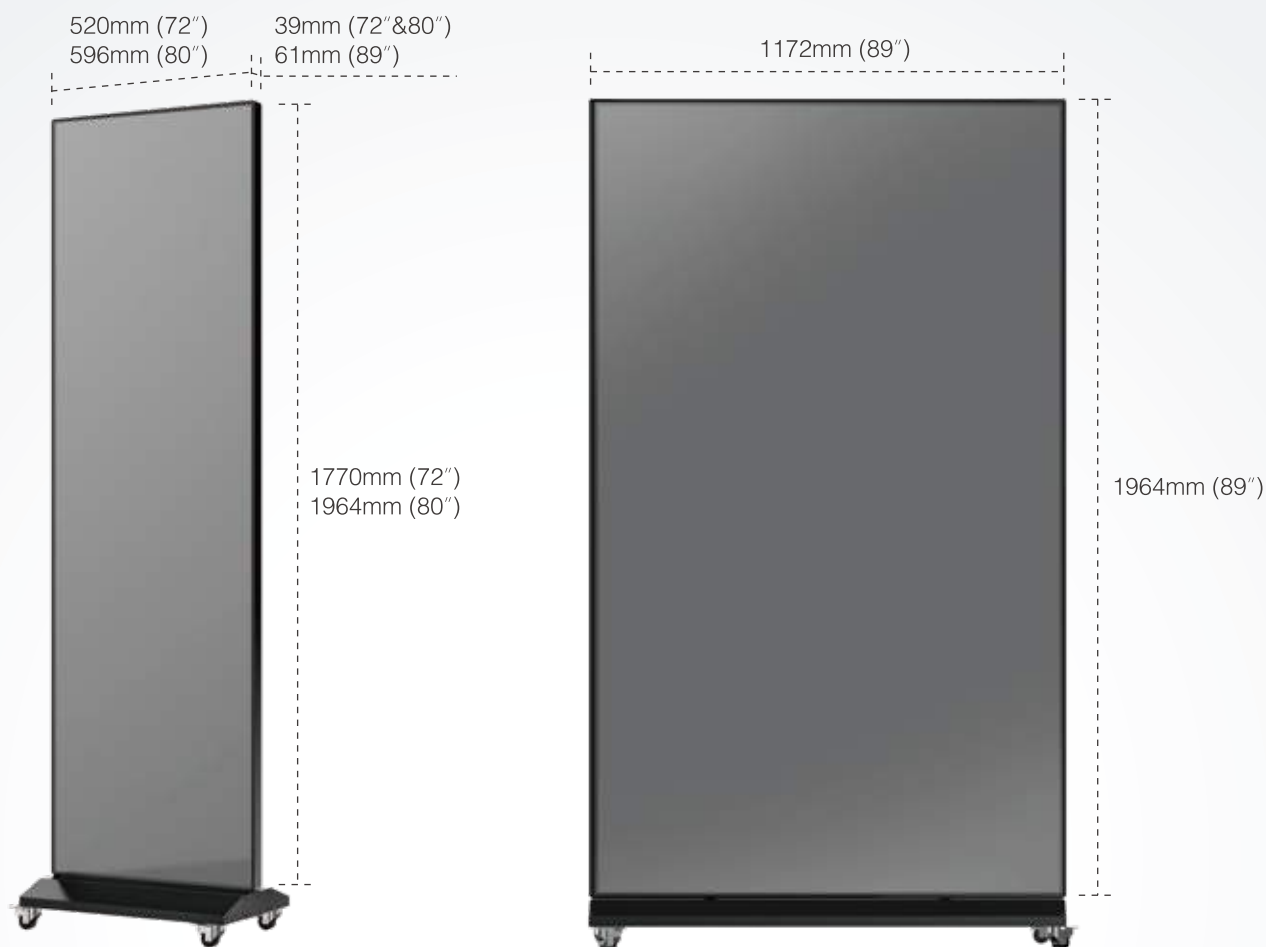

Specifications	Xirius 2.6-72"	Xirius 2.5-80"	Xirius 1.8-80"	Xirius 2.5-89"	Xirius 1.8-89"
Pitch	2.6mm	2.5mm	1.8mm	2.5mm	1.8mm
LED Type	SMD	SMD	SMD	SMD	SMD
Brightness	800cd/m <sup>2</sup>	800cd/m <sup>2</sup>	800cd/m <sup>2</sup>	800cd/m <sup>2</sup>	800cd/m <sup>2</sup>
Refresh Rate	>1920Hz	>1920Hz	>1920Hz	>1920Hz	>11920Hz
Power Consumption (Max/Ave) (W/display)	450/175	450/175	450/175	450/175	450/175
Module Resolution	96x96px	112x84px	152x114px	112x84px	152x114px
Module Size	250x250mm	288x216mm	288x216mm	288x216mm	288x216mm
Display Resolution	192x672px	224x756px	304x1026px	448x756px	608x1026px
Display Size	500x1750mm	576x1944mm	576x1944mm	1152x1944mm	1152x1944mm
Overall Dimension	520x1770mm	596x1964mm	596x1964mm	1172x1964mm	1172x1964mm
Weight	28kg	36kg	36kg	80kg	80kg
IP Rating	IP40	IP40	IP40	IP40	IP40
Screen ratio (WxH)	9:32	9:32	9:32	9:16	9:16
Operating Temperature/Humidity (°C/RH)	-10~40/10~90%	-10~40/10~90%	-10~40/10~90%	-10~40/10~90%	-10~40/10~90%

## Optional installation solutions




Seat Mount





Wall Mount

## Internet remote cluster control and management

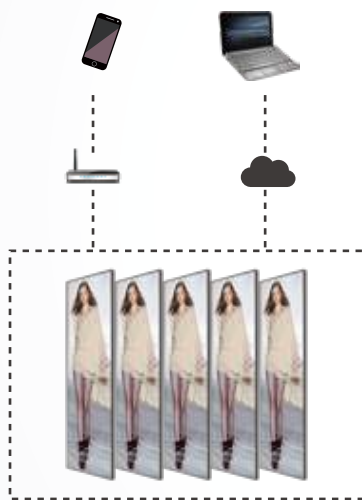

## Multiple communication modes

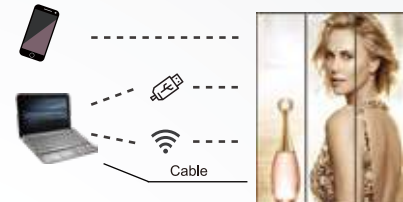

## More imaginative forms of expression



Video splicer is needed.



## The best display ratio



9:32

9:32

9:16

## Double Wifi, receive or send the Wifi signal

